


GENUINE CAT PUMPS LUBRICANTS & FLUIDS

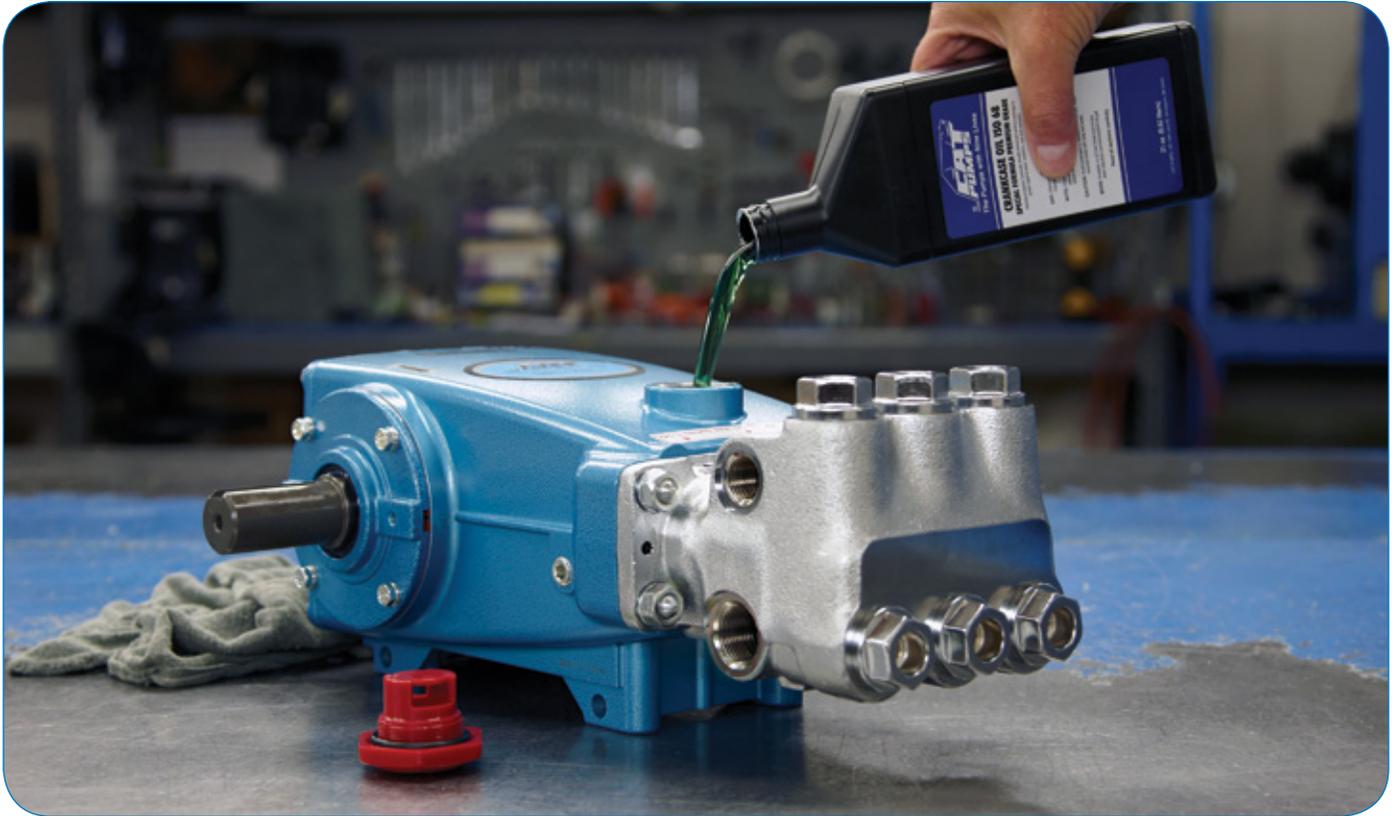

Protect Your Pump with Field Validated Lubricants

Cat Pumps hydraulic crankcase oils are specially formulated to meet stringent quality and performance specifications. With years of field validation, many customers report thousands of trouble-free hours from the pump drive-end. With this kind of performance, why risk downtime by using a standard grade oil? Trust Cat Pumps to provide the best lubricants for its pumps. With the Cat Pumps name on it, you know has to be the best. Use only genuine Cat Pumps lubricants and fluids to protect your pump investment.

Cat Pumps Crankcase Oil Features and Benefits:

- Premium base stocks are the backbone of the formulation that provides superior lubricity to protect internal drive components.
- The proprietary high technology additive system offers a number of superior performance advantages:
 - Anti-wear additives protects metal to metal drive surfaces extending drive life
 - High oxidative and chemical stability resists deposit formations and provides consistent fluid performance
 - Premium anti-corrosion additives offer protection in the most demanding operating environments



Gear Lube

- Anti-wear, anti-rust, anti-corrosion chemistry to extend gearbox life.
- Excellent oxidation and thermal stability extending the fluid life.
- Excellent demulsification and filterability characteristics easy removal of water and other contaminants.
- Used on all Cat Pumps gearbox pumps except 3CP1120G (Cat Pumps Oil is used instead of gear lube).



Anti-Seize

(Non-food grade and food grade anti-seize products available)

- Non-food grade used in hollow and solid shaft direct drive pumps, gearbox, gearbox pumps and direct drive bolt kits.
- Protects metal-to-metal surfaces from galling, seizing, friction and wear.
- Recommended for driveshaft and keyway application to minimize excessive seizing.
- Food grade anti-seize is recommended for all stainless steel pumps.



Pump Protector

- Lubricates seals, valves and valve seats to prevent sticking.
- Inhibits corrosion and mineral deposits.
- Used on gas engine and electric motor pressure washers.
- Winterizer – protects pumps from freezing to -25° F (-32° C).



Liquid Gasket

- Used to fill between mating surfaces within the manifold. The product is used on seals and O-ring crevices. The sealant prevents stagnant fluid formation in the crevices that can cause corrosion.
- Used in applications with aggressive water characteristics (i.e., car wash, reverse osmosis, leachate, salt water reinjection).



Model	Description	Weight	Dimensions
-------	-------------	--------	------------

Crankcase Oil for all pumps except R-Series and Specialty models (ISO 68)

Change after first 50 hours then every 500 hours or 3 months.

6107	(1) 21 oz. bottle	21 oz.	9" x 3.25" x 2"
6102	(1), 2.5 gal. jug	20 lbs.	15.25" x 9.5" x 7"
6105	Case of (2), 2.5 gal. jugs	41 lbs.	15" x 13.5" x 10"
6100	Case of (12), 21 oz. bottles	17 lbs.	9.5" x 12" x 7"
6109	(1) 30 gal. drum	243 lbs.	18.5" x 29"
997657*	(1) 1.0 gal. jug	7.7 lbs.	12" x 8" x 8"

*Food grade oil (FMO-350-AW)

Crankcase Oil for R-Series and Specialty Pump Models Only (ISO 100)

Change after first 20 hours then every 3000 hours or 6 months.

6121	(4) 4 Liter	35.5 lbs.	13" x 14.5" x 10"
6115	(1) 5 gal. pail	42.75 lbs.	12" x 15"
6116	(1) 16 gal. drum	126 lbs.	14.75" x 26.5"

Gear Box Lube (80-90W, ISO 220)

Change after first 50 hours then every 500 hours or 3 months.

6110	(1) 16 oz. bottle	16 oz.	7.25" x 3" x 2"
6111	Case of (12), 16 oz. bottles	12.45 lbs.	7.5" x 9.5" x 8.25"

Pressure Washer Pump Protector

Use to protect pump from freezing and for long-term storage.

6208	Case of (6), 12 oz. bottles	4.5 lbs.	7.5" x 5" x 7.313"
------	-----------------------------	----------	--------------------

Anti-Seize

Note: Reference technical bulletin 095 for additional information.

6106	(1) 2 ml tube (non-food grade)	.011 oz.	.69" x 2.45"
6119	(1) 2 oz. tube (food grade)	.10 oz.	1.5" x 5.1"

Liquid Gasket

Note: Reference technical bulletin 053 for use of liquid gasket (6124).

6124	(1) 3 oz. tube liquid gasket	.25 lbs.	1.75" x 5.5"
------	------------------------------	----------	--------------

Use genuine lubricants from Cat Pumps!

CAT PUMPS

1681 94th Lane NE, Minneapolis, MN 55449

Phone: 763.780.5440 Fax: 763.780.2958 e-mail: info@catpumps.com www.catpumps.com